

ARCA 302015



Sample image

Order symbol : ARCA 302015

Product nr : 8120002

Description : Cabinet, PC


Remarks : Grey cover, 1-point locking, hinges on the long side

EAN : 6418074079138

El. number :

- Finland : 3423044
- Denmark : 8212091003
- Sweden : 2500110




Including : Cabinet base. door with PUR gasket. mounting plate. screws for mounting plate. 3mm double bit lock(s) with key. S versions with swinghandle 2-point locking system. Door guide included.

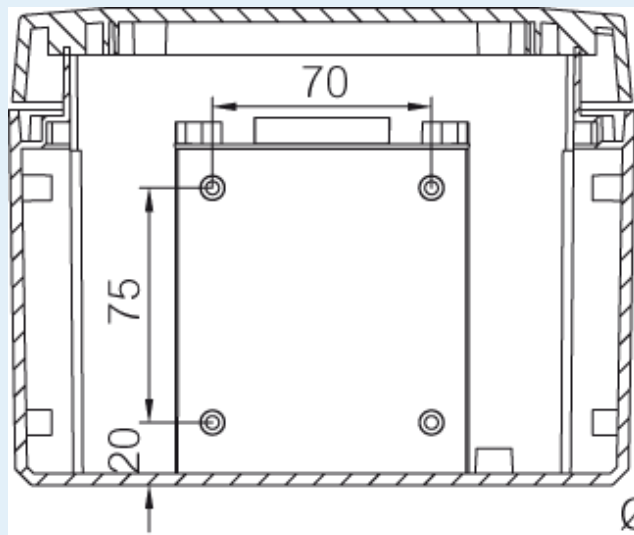

3020



2030

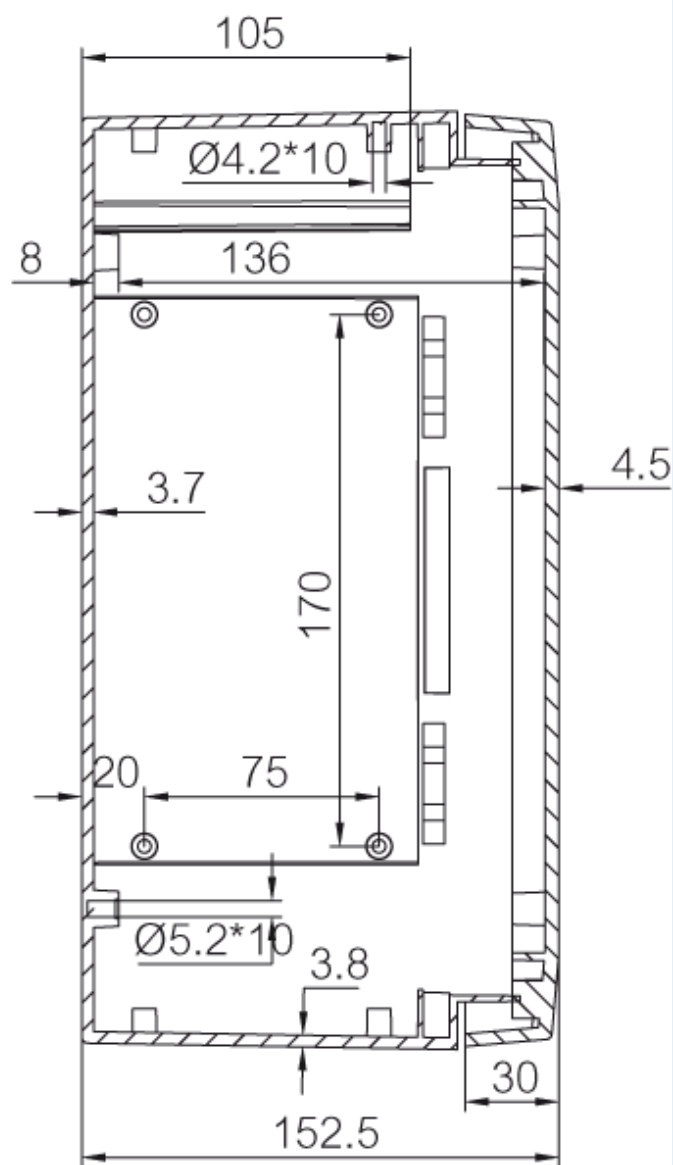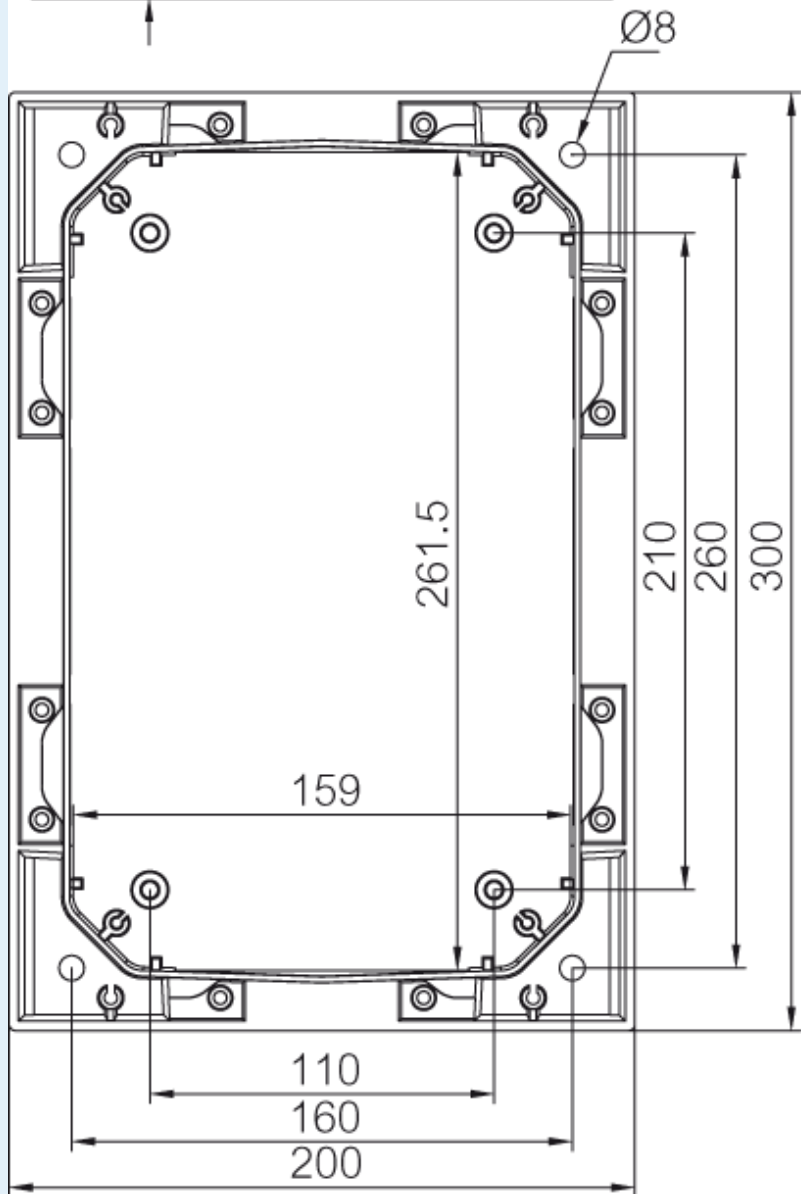

302015

Dimensions :

	Height	Width	Depth
mm :	300	200	150
inch :	11.81	7.87	6.22

Accessories :

MPP ARCA 3020	Mounting plate perforated (250x150x2 mm - 26x11 mm) (250 x 150 x 2)
DRS ARCA 302015	DIN rail frame set (285 x 185 x 35)

Materials :

Material :	Polycarbonate
Base colour :	RAL 7035 -light grey
Cover colour :	RAL 7035 -light grey
Gasket material :	Polyurethane

Temperatures :

Temperature °C (short term) :	-40 ... 120
Temperature °C (continuous) :	-40 ... 80
Temperature °F (short term) :	-40 ... 250
Temperature °F (continuous) :	-40 ... 175

MPMP ARCA 3020	Mounting plate multiperforated (250x150x2 mm - ø3.6 mm) (250 x 150 x 2)
SBK ARCA 20	Support bar kit (140 x 40 x 30)
PMK ARCA 20	PoleMounting kit, for pole ø100-300mm (385 x 285 x 35)
RCS ARCA 3020	Rain canopy set for size 3020 (20 x 200 x 30)
MPS ARCA 3020	Mounting plate (250x150x2 mm) (250 x 150 x 2)
SBK ARCA 30	Support bar kit (235 x 40 x 30)
IDS ARCA 3020	Inner door set (285 x 185 x 35)
MPX ARCA 3020	Mounting plate (250x150 mm) (250 x 150 x 5)

Rating :

Ingress protection (EN 60529):	IP66;
Impact Resistance (EN 62262):	IK10;
Electrical insulation :	Totally insulated
Halogen free (DIN/VDE 0472, Part 815):	1
UV resistance :	UL 508
Flammability Rating :	UL 94 5VA
Glow Wire Test (IEC 695-2-1) °C :	960 °C
NEMA Class	NEMA 1, 4, 4X, 12 and 13

Certificates :

Certificate FI 40467