

# ARCA 403015

**FIBOX**  
Enclosing innovations



Sample image

**Order symbol :** ARCA 403015

**Product nr :** 8120006

**Description :** Cabinet, PC


**Remarks :** Grey cover, 2-point locking, hinges on the long side

**EAN :** 6418074079176

**El. number :**

- Finland : 3423051
- Denmark : 8212091045
- Sweden : 2500112

**Including :** Cabinet base. door with PUR gasket. mounting plate. screws for mounting plate. 3mm double bit lock(s) with key. S versions with swinghandle 2-point locking system. Door guide included.

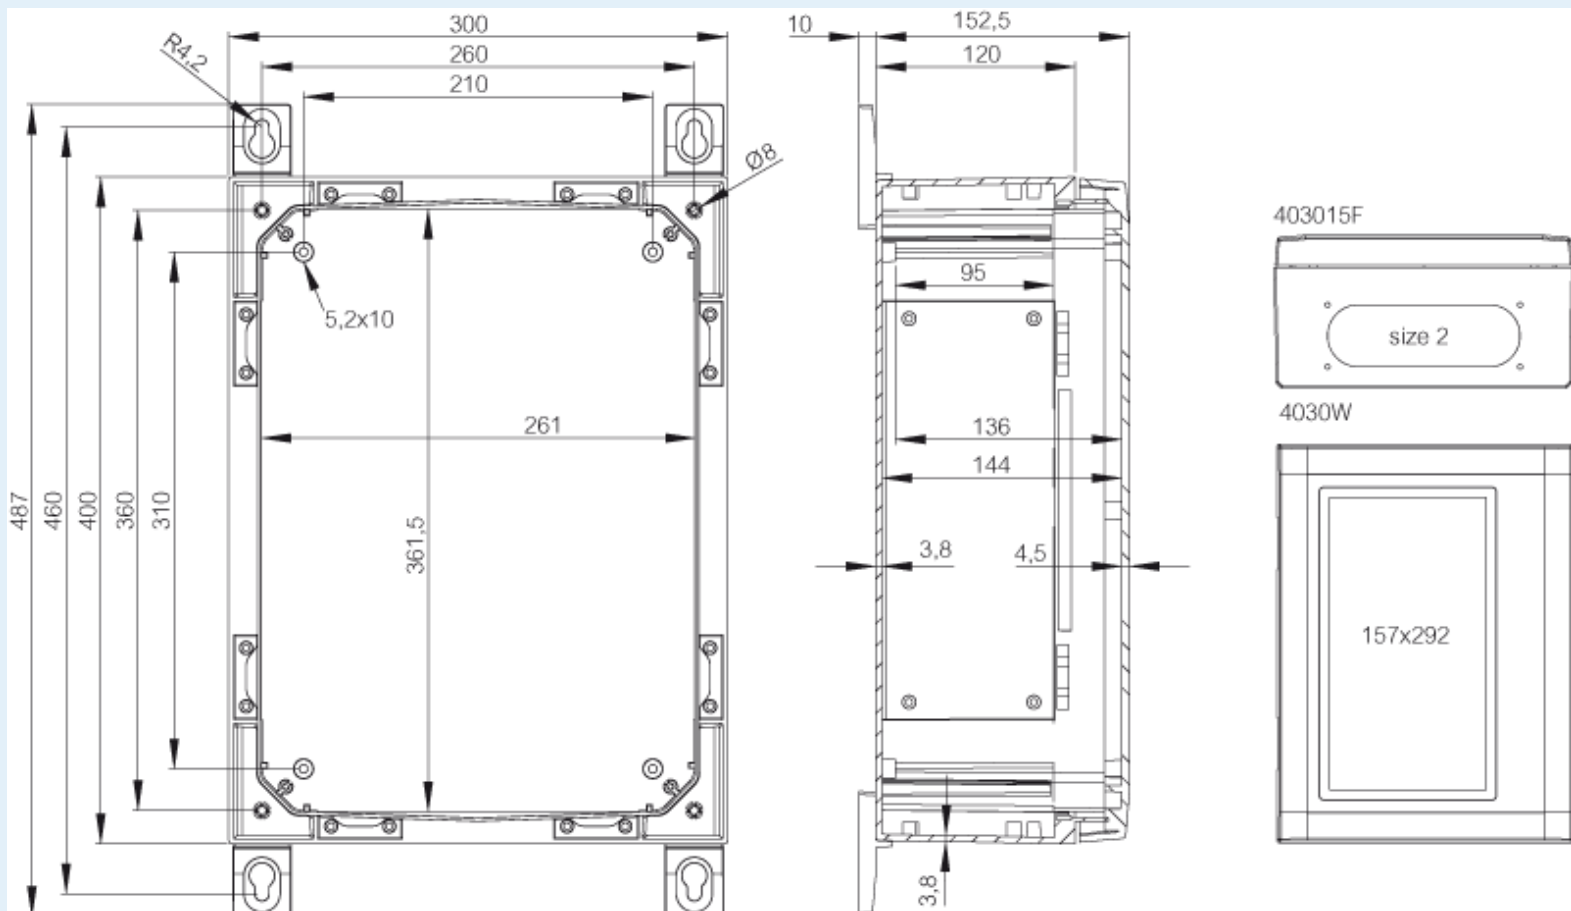

**Dimensions :**

**Height**

**Width**

**Depth**

**Accessories :**

mm :	400	300	150
inch :	15.75	11.81	6.22

#### Materials :

Material :	Polycarbonate
Base colour :	RAL 7035 -light grey
Cover colour :	RAL 7035 -light grey
Gasket material :	Polyurethane

#### Temperatures :

Temperature °C (short term) :	-40 ... 120
Temperature °C (continuous) :	-40 ... 80
Temperature °F (short term) :	-40 ... 250
Temperature °F (continuous) :	-40 ... 175

DRS ARCA 403015	DIN rail frame set (385 x 285 x 35)
SBK ARCA 30	Support bar kit (235 x 40 x 30)
RCS ARCA 4030	Rain canopy set for size 4030 (20 x 300 x 30)
SBK ARCA 40	Support bar kit (340 x 40 x 30)
IDS ARCA 4030	Inner door set (385 x 285 x 35)
PMK ARCA 30	PoleMounting kit, for pole ø100-300mm (385 x 285 x 35)
DSP ARCA VLS	Door stopper ARCA, vertical, left, small
MPMP ARCA 4030	Mounting plate multiperforated (350x250x2 mm - ø3.6 mm) (350 x 250 x 2)
DSP ARCA VRS	Door stopper ARCA, vertical, right, small
MPS ARCA 4030	Mounting plate (350x250x2 mm) (350 x 250 x 2)
MPP ARCA 4030	Mounting plate perforated (350x250x2 mm - 26x11 mm) (350 x 250 x 2)
MPX ARCA 4030	Mounting plate (350x250 mm) (350 x 250 x 5)

#### Rating :

Ingress protection (EN 60529):	IP66;
Impact Resistance (EN 62262):	IK10;
Electrical insulation :	Totally insulated
Halogen free (DIN/VDE 0472, Part 815):	1
UV resistance :	UL 508
Flammability Rating :	UL 94 5VA
Glow Wire Test (IEC 695-2-1) °C :	960 °C
NEMA Class	NEMA 1, 4, 4X, 12 and 13

#### Certificates :

Certificate FI 40467