

ARCA 705030

FIBOX
Enclosing innovations



Sample image

Order symbol : ARCA 705030

Product nr : 8120017

Description : Cabinet, PC


Remarks : Grey cover, 2-point locking, hinges on the long side

EAN : 6418074079282

El. number :

- Finland : 3423112
- Denmark : 8212091155
- Sweden : 2500120

Including : Cabinet base. door with PUR gasket. mounting plate. screws for mounting plate. 3mm double bit lock(s) with key. S versions with swinghandle 2-point locking system. Door guide included.

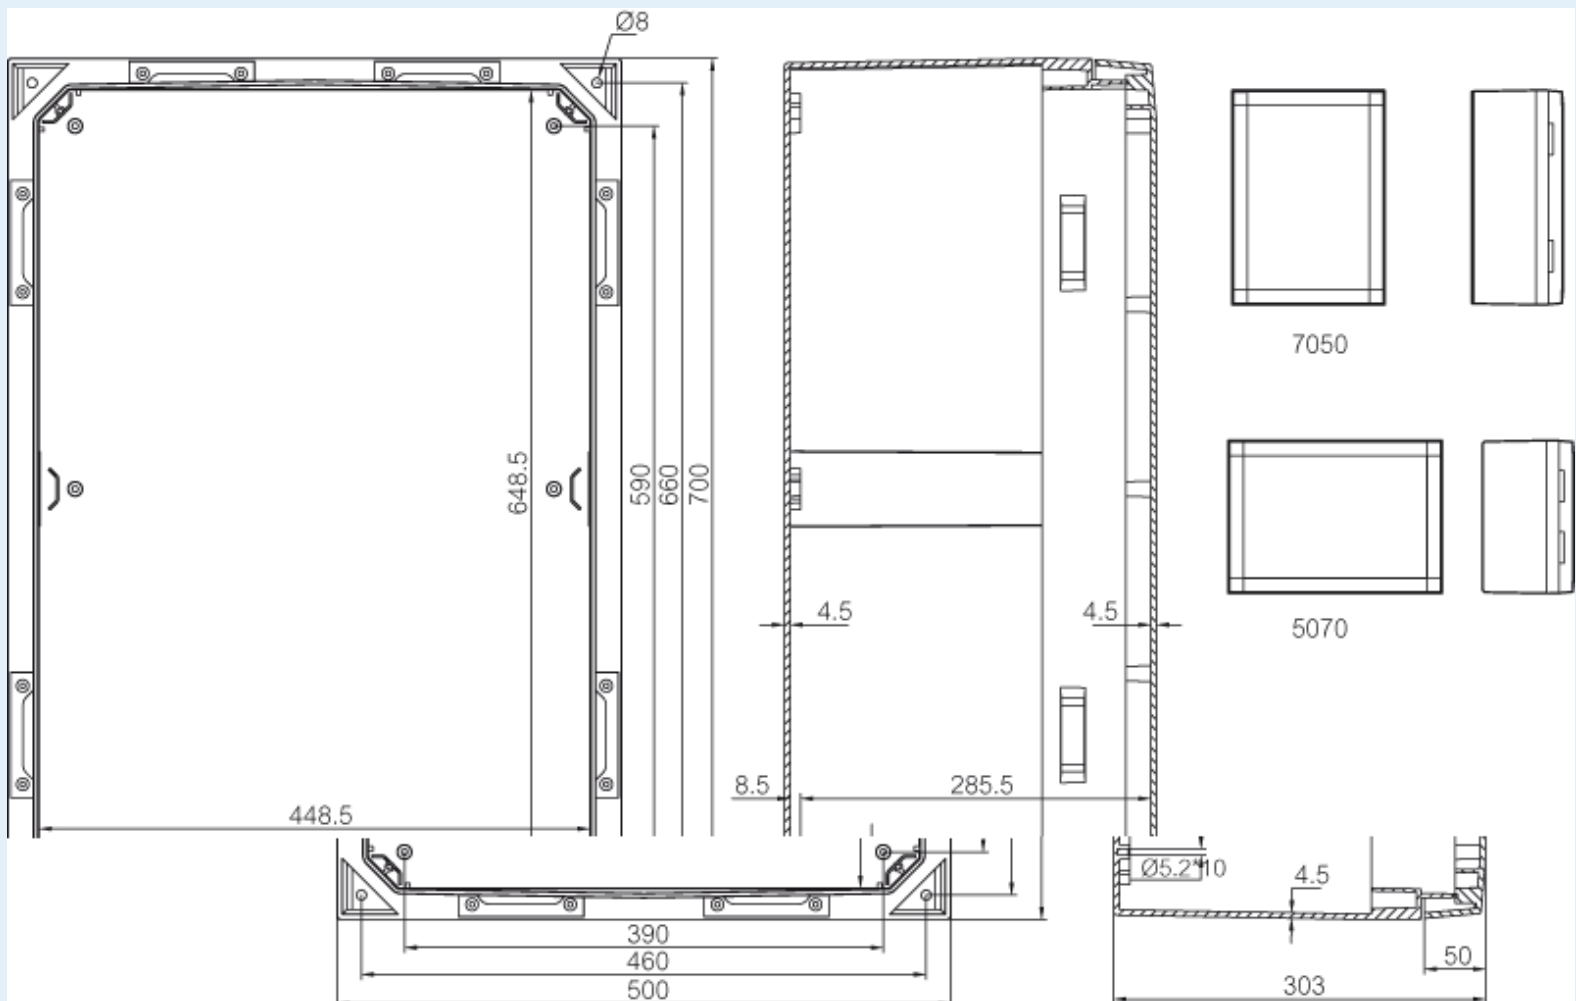

Dimensions :	Height	Width	Depth
mm :	700	500	300
inch :	27.56	19.69	12.2

Materials :

Material :	Polycarbonate
Base colour :	RAL 7035 -light grey
Cover colour :	RAL 7035 -light grey
Gasket material :	Polyurethane

Temperatures :

Temperature °C (short term) :	-40 ... 120
Temperature °C (continuous) :	-40 ... 80
Temperature °F (short term) :	-40 ... 250
Temperature °F (continuous) :	-40 ... 175

Accessories :

SBK ARCA 50	Support bar kit (435 x 40 x 30)
MPX ARCA 7050	Mounting plate (630x430 mm) (630 x 430 x 5)
IDS ARCA 7050	Inner door set (685 x 485 x 35)
DSP ARCA RM	Door stopper ARCA, right, midsize 5070-8060
RCS ARCA 7050	Rain canopy set for size 7050 (20 x 500 x 30)
MPP ARCA 7050	Mounting plate perforated (630x430x2 mm - 26x11 mm) (630 x 430 x 2)
SBK ARCA 70	Support bar kit (615 x 50 x 30)
DSP ARCA LM	Door stopper ARCA, left, midsize 5070-8060
DRS ARCA 705030	DIN rail frame set (685 x 485 x 35)
MPS ARCA 7050	Mounting plate (630x430x2 mm) (630 x 430 x 2)
MPMP ARCA 7050	Mounting plate multiperforated (630x430x2 mm - ø3.6 mm) (630 x 430 x 2)
PMK ARCA 50	PoleMounting kit, for pole ø100-300mm (485 x 385 x 35)

Rating :

Ingress protection (EN 60529):	IP66;
Impact Resistance (EN 62262):	IK10;
Electrical insulation :	Totally insulated
Halogen free (DIN/VDE 0472, Part 815):	1
UV resistance :	UL 508
Flammability Rating :	UL 94 5VA
Glow Wire Test (IEC 695-2-1) °C :	960 °C
NEMA Class	NEMA 1, 4, 4X, 12 and 13

Certificates :

Certificate FI 40467