

# ABS 125/125 HG



Sample image

**Order symbol :** ABS 125/125 HG

**Product nr :** 6081310

**Description :** Enclosure, ABS



**Remarks :** High base, grey cover

**EAN :** 6418074022882

**El. number :**

- Finland : 3420535
- Denmark : 8212023217
- Sweden : 2535736

**Including :** Base with TPE gasket. screws for mounting plate/DIN-rail and cover with polyamide cover screws.

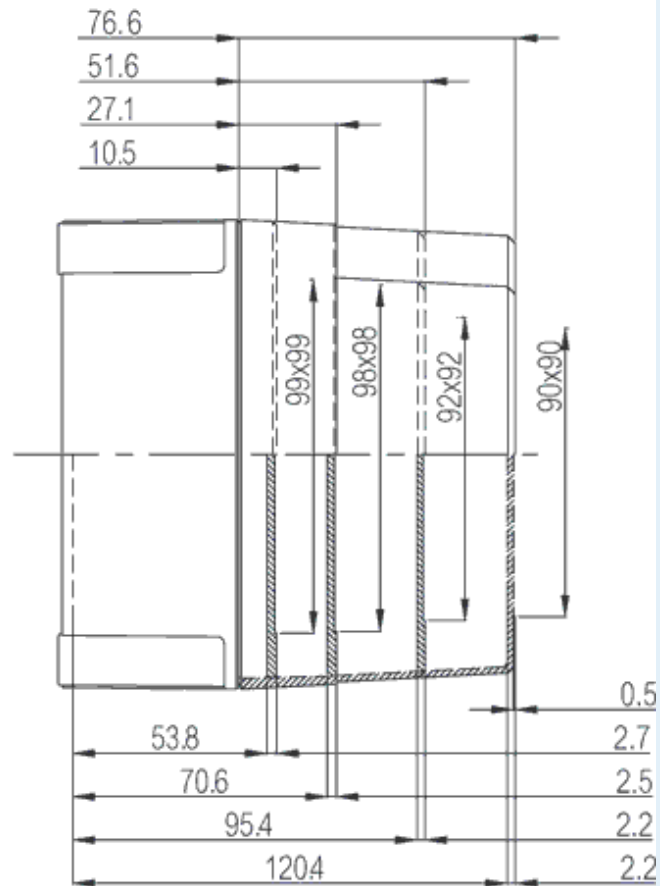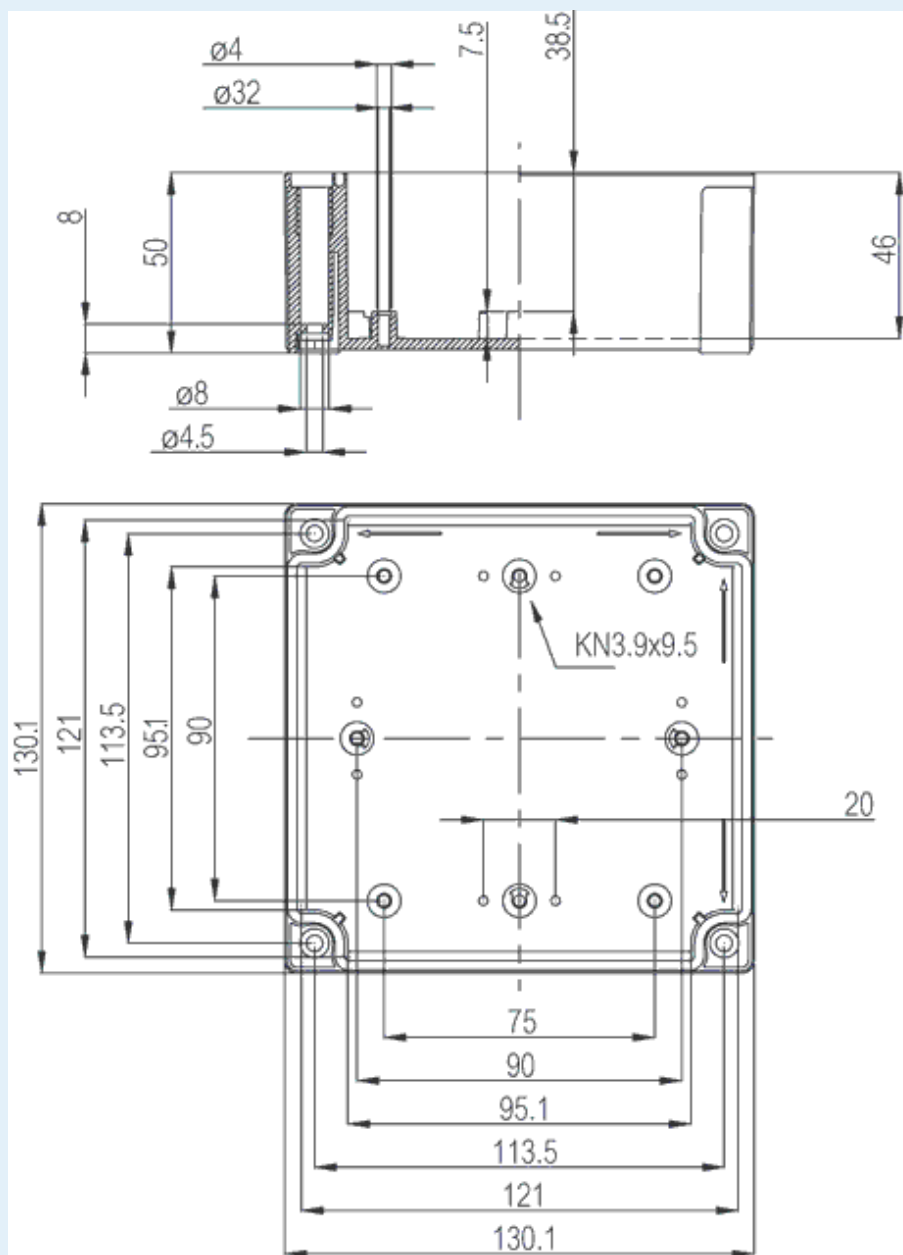

**Dimensions :**                      **Height**                      **Width**                      **Depth**

mm :                                      130                                      130                                      125  
 inch :

**Materials :**

Material :                                      ABS  
 Base colour :                                      RAL 7035 -light grey  
 Cover colour :                                      RAL 7035 -light grey  
 Gasket material :                                      Polyurethane

**Accessories :**

MIV 10                                      DIN-35 Mounting rail, for enclosures:  
 (100 x 35 x 1)  
 HFP 130                                      Front plate hinge series  
 FP A 125/  
 130                                      Front plate (Aluminium), for enclosures:  
 (120 x 112 x 1)  
 MIN 10                                      DIN-15 Mounting rail, for enclosures:  
 (100 x 15 x 1)  
 FP 22046                                      Wall fastening lug (4 pcs)  
 MIV 125                                      Mounting plate (Galvanized steel), for  
 enclosures:  
 (98 x 98 x 1)

**Temperatures :**

Temperature °C (short term) :                                      -40 ... 80  
 Temperature °C (continuous) :                                      -40 ... 60  
 Temperature °F (short term) :                                      -40 ... 175  
 Temperature °F (continuous) :                                      -40 ... 140

**Rating :**

Ingress protection (EN 60529):                                      IP66; IP67;  
 Impact Resistance (EN 62262):                                      IK07;  
 Electrical insulation :                                      Totally insulated  
 Halogen free (DIN/VDE 0472, Part 815):                                      1

UV resistance :	-
Flammability Rating :	UL 94 HB
Glow Wire Test (IEC 695-2-1) °C :	650 °C
NEMA Class	

**Certificates :**

Certificate FI 40847