

# PC 95/35 LG



Sample image

**Order symbol :** PC 95/35 LG

**Product nr :** 6012331

UL Code : 6412331

UL Name : UL PC 95/35 LG

**Description :** Enclosure, PC

**Remarks :** Low base, grey cover


**Including :** Base with PUR gasket. screws for mounting plate/DIN-rail and cover with polyamide cover screws.

**EAN :** 6418074054616

**El. number :**

- Finland : 3421360
- Denmark : 8212027682
- Sweden : 6012331

# MNX 100×100×35-50

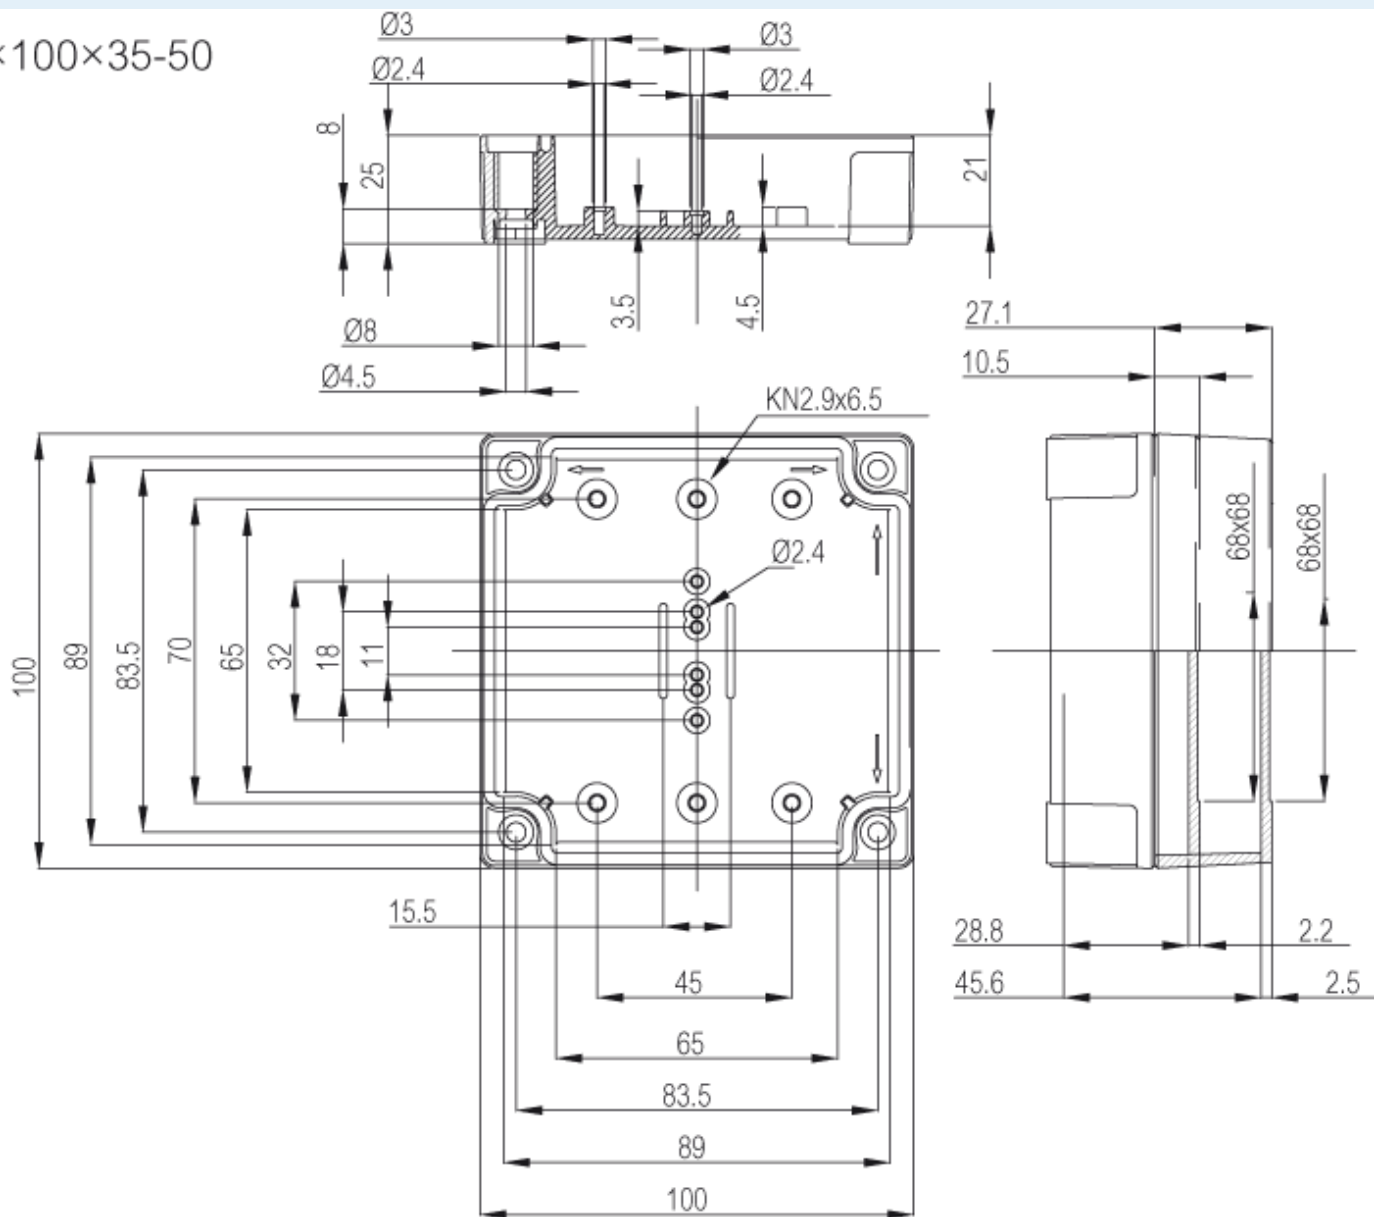

Dimensions :	Height	Width	Depth
mm :	100	100	35
inch :	3.94	3.94	1.38

## Materials :

Material :	Polycarbonate
Base colour :	RAL 7035 -light grey
Cover colour :	RAL 7035 -light grey
Gasket material :	Polyurethane

## Temperatures :

Temperature °C (short term) :	-40 ... 120
Temperature °C (continuous) :	-40 ... 80
Temperature °F (short term) :	-40 ... 250
Temperature °F (continuous) :	-40 ... 175

## Accessories :

MIN 8	DIN-15 Mounting rail, for enclosures: (80 x 15 x 1)
B-3	DIN-35 Mounting rail, for enclosures: (80 x 35 x 1)
FP 22046	Wall fastening lug (4 pcs)
MIV 95	Mounting plate (Galvanized steel), for enclosures: (66 x 80 x 1)

## Rating :

Ingress protection (EN 60529):	IP66; IP67;
Impact Resistance (EN 62262):	IK08;
Electrical insulation :	Totally insulated
Halogen free (DIN/VDE 0472, Part 815):	1
UV resistance :	UL 508
Flammability Rating :	UL 746C 5"
Glow Wire Test (IEC 695-2-1) °C :	960 °C
NEMA Class	Type 1, 4, 4X, 6

**Certificates :**

Certificate FI 40847